


How to open the key Edit

1. Select Installation, press OK key, enter the password 0000
2. In the antenna settings, enter the password 6666, open the key edit

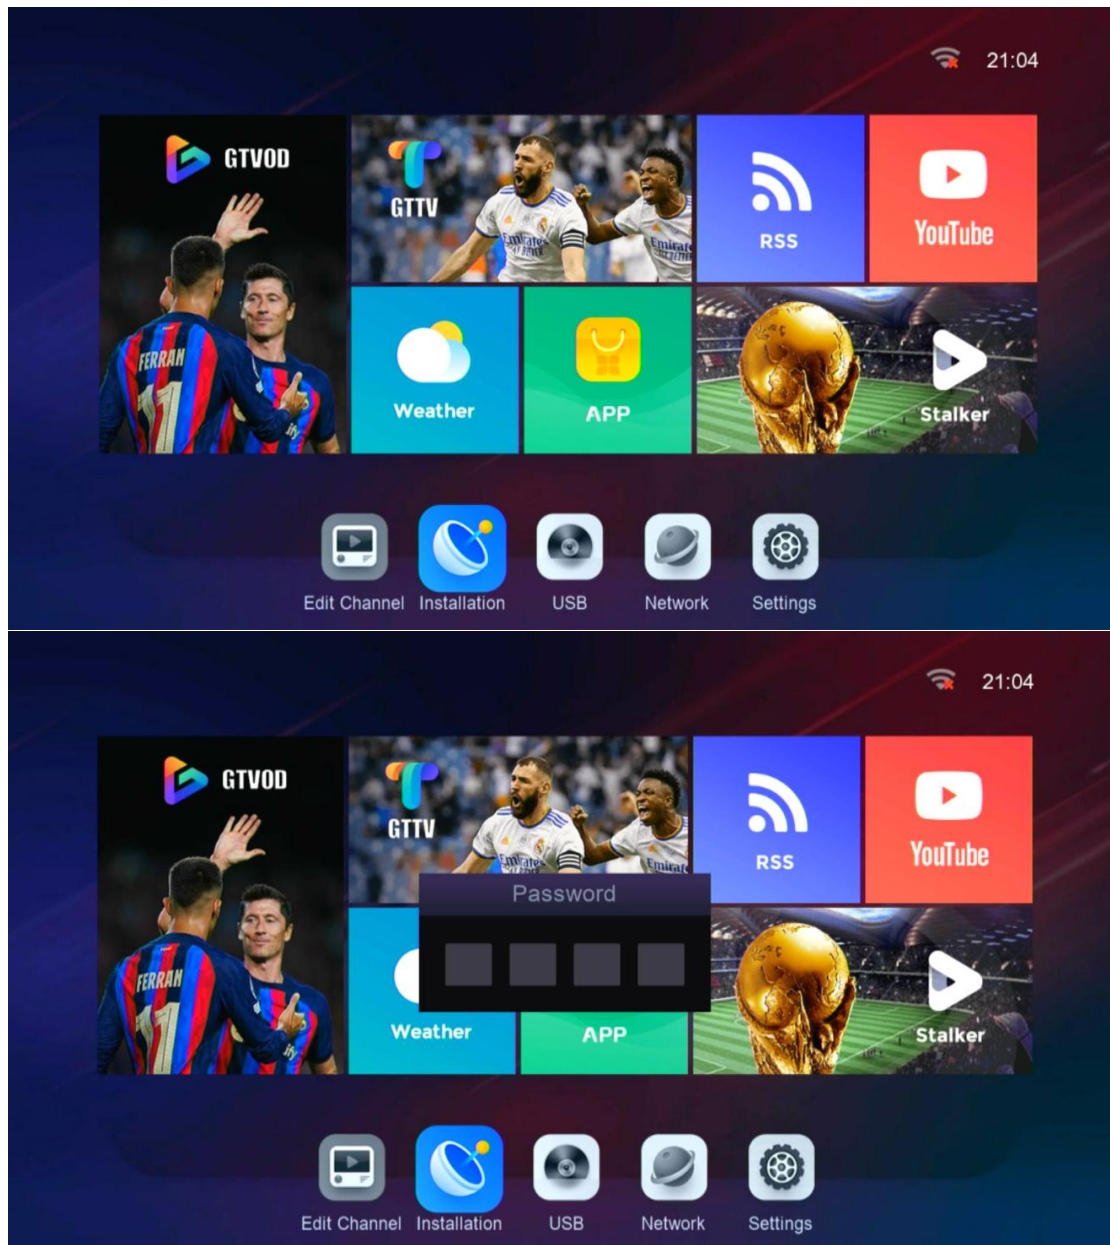

Installation

Antenna Settings

Factory Default

USALS Setup

Key Edit

Satellite	<	Astra1 (19.2E)	>
Transponder	<	3908/V/27500/Auto	>
LNB Type	<	05150	>
LNB Power	<	13V/18V	>
22KHz	<	Auto	>
DiSEqC1.0	<	None	>
DiSEqC1.1	<	None	>
Motor	<	None	>

Strength 90%

Quality 98%

● Add
 ● Move
 ● Delete
 ● Rename

OK Pop-up List
 ↔ Change Setting
 ↔ Move Cursor
 ← Exit

Installation

Antenna Settings

Factory Default

USALS Setup

Key Edit

PowerVU

BISS

Viaccess2

Constant CW

Tandberg

OK Select
 ↔ Move Focus
 ← Close

How to open the key edit when playing the channel

1. On the encryption channels such as BISS POWER VU, press the [PG+]/[PG-]key of the remote control to open the key edit

