

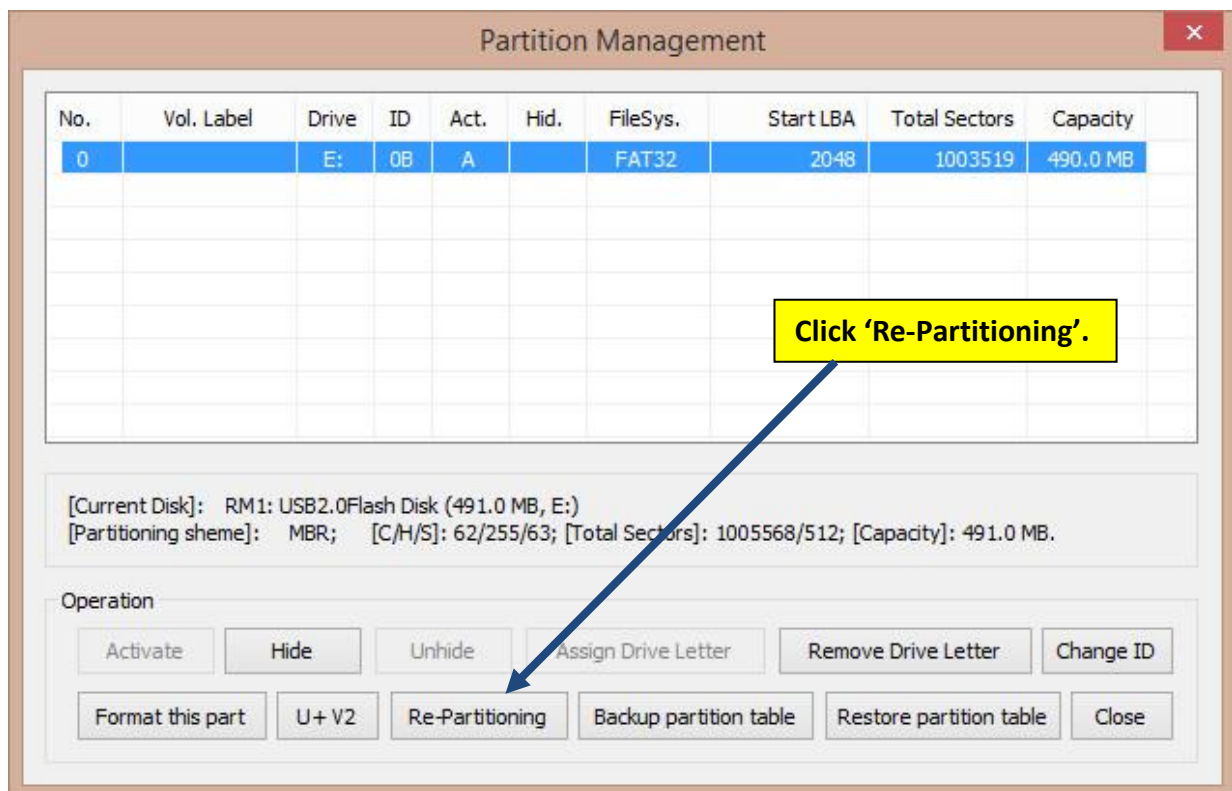


FORMATTING USB DRIVES FOR FLASHING ZGEMMA H2S WITH BOOTICE

Download the BOOTICE.exe utility [here](#).

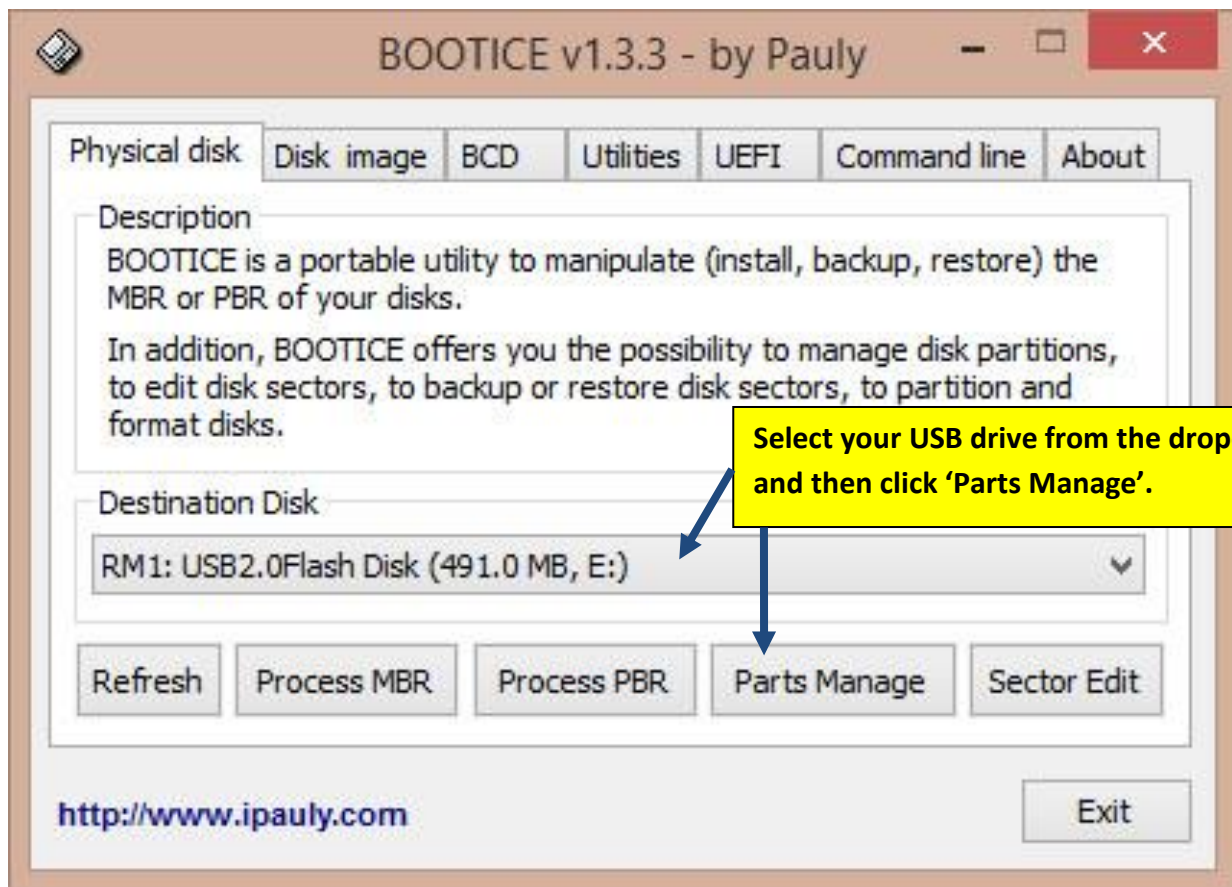


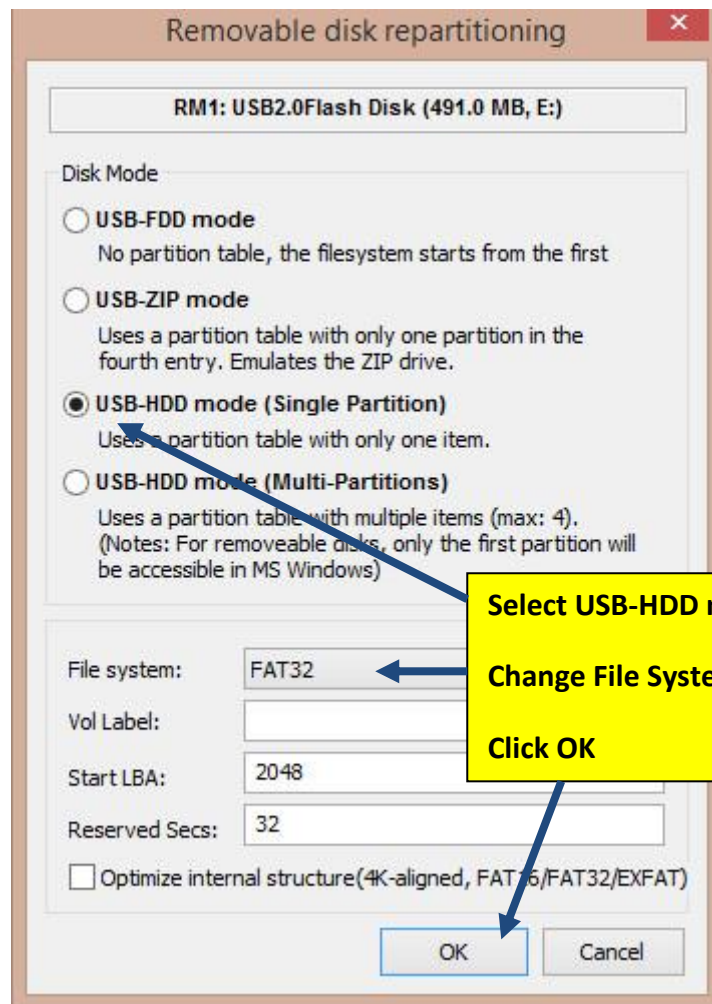

Select USB-HDD mode (Single Partition)

Change File System to 'FAT32'

Click OK

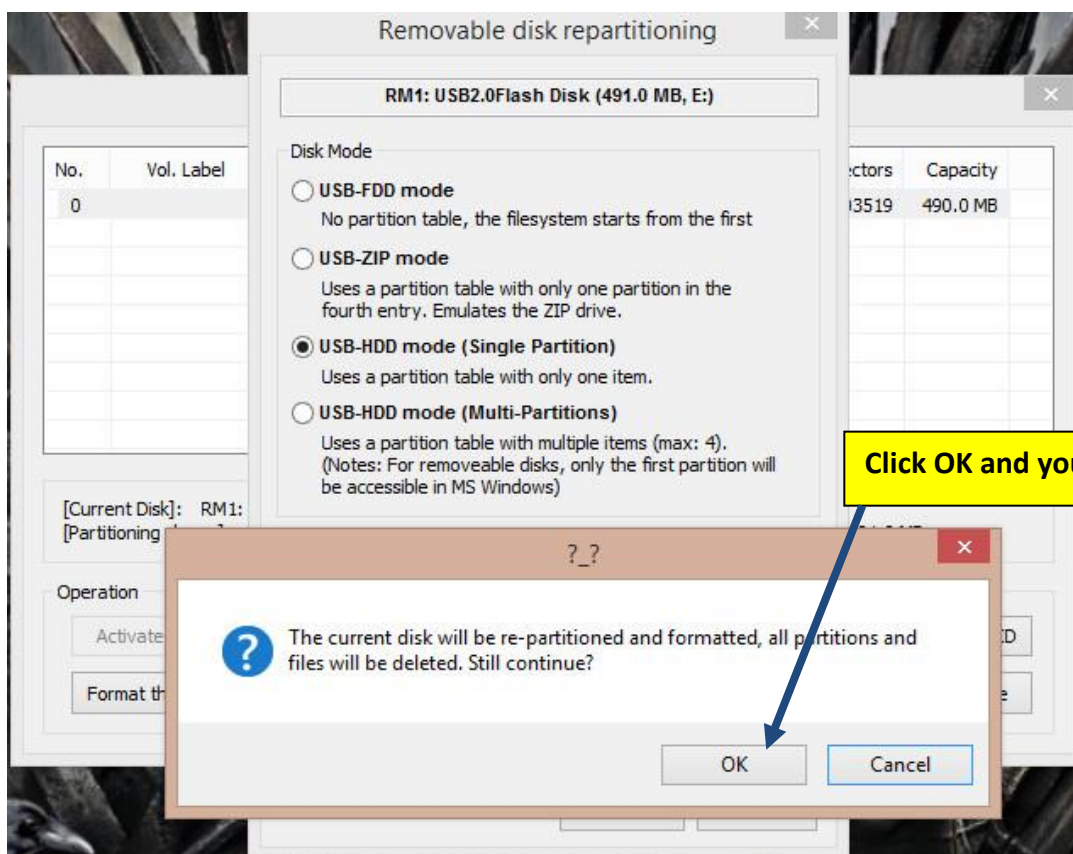

Click OK and you're done!

FLASHING AN IMAGE

(For ZGEMMA but will be similar for other receivers)

If you're flashing from a working box make sure you have your line details backed up to PC.

The lines are usually in **usr/keys in the root of the Zgemma.**

Just copy the entire keys folder to your PC.

Extract your zip file to the Fat32 formatted USB stick.

(Should result in just one folder on the stick named zgemma)

Switch the Zgemma off with the white button on the back.

Insert the Fat32 USB stick into the back USB port and switch the white switch on.

The display will show 'FLSH'

If the display shows 'USB' you have to press the silver power button on the front left of the unit to start the flash.

After about a minute the display will change from 'FLSH' to 'BOOT' at which point turn the box off using the white switch on the back.

Unplug the USB stick and insert the drive that you intend to use for recordings.

Switch on using the white switch and allow to boot up.

You can now configure your box according to the build instructions.

Willo3092

willobuild@gmail.com

<https://willobuild.yolasite.com>